





UNC #4-40 Hexscrew

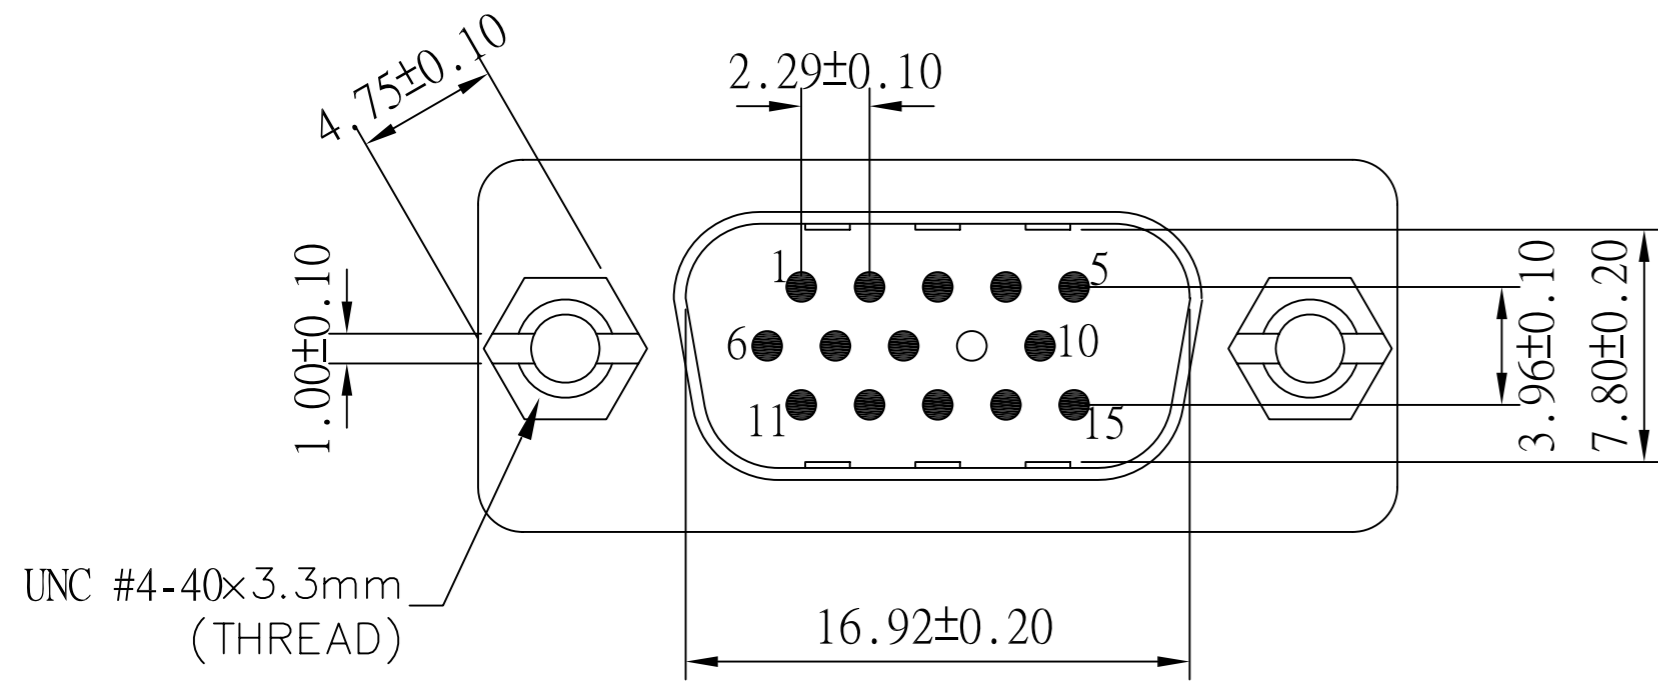

UNC #4-40x3.3mm
(THREAD)

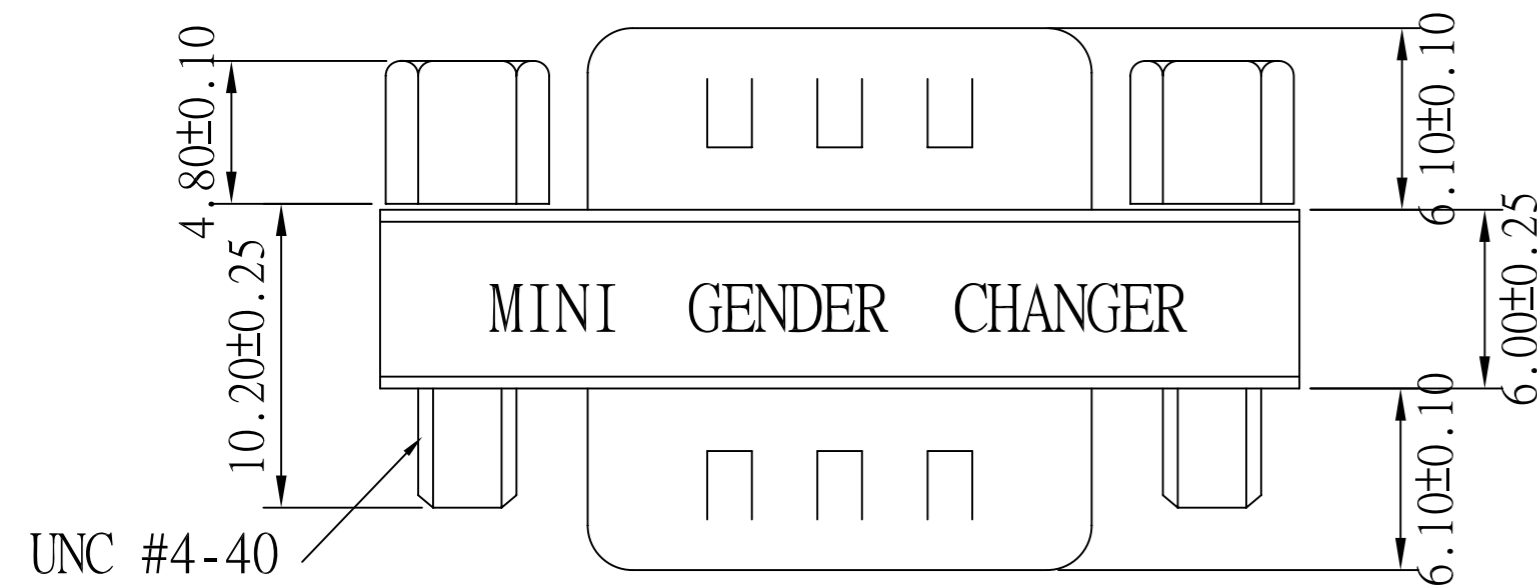

UNC #4-40

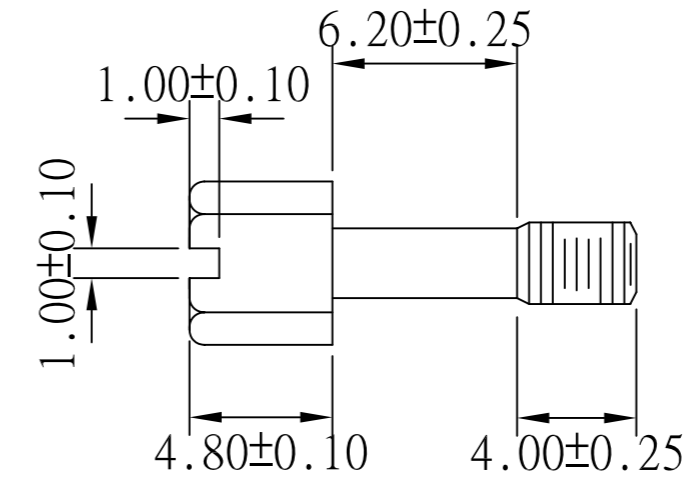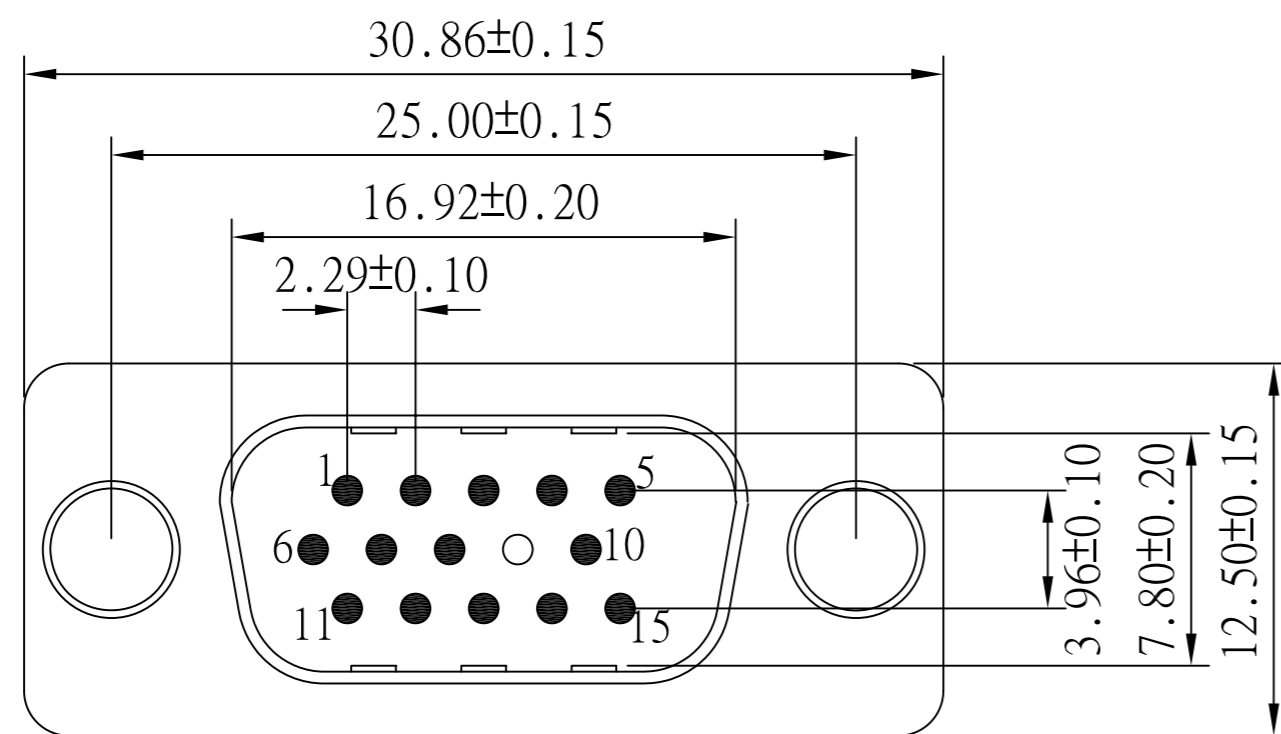

HGC 15 M/M GENDER CHANGER

PIN OUT: 15Male

15Male

1	-----	1
2	-----	2
	~	
8	-----	8
10	-----	10
	~	
15	-----	15
G	-----	G

Label: yellow color with black charactor
One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin plated shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC FOR ONE Minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C — +105°C

Edition A2	ASSMANN ELECTRONIC GMBH							
SCALE 2:1	UNLESS OTHER-WISE SPECIFIED TOLERANCE: 0.0: ±0.20 0.00: ±0.15 0.000: ±0.05	PART NO. AB 418			DWG NO.		DATE NOV 10, 2006	
UNIT mm		DRAWN <i>NORMAN</i>	CHECKED <i>ALD</i>	APPRD				
Page 1/1								